



Special shifts 25-Oct_26-Aix for base									
Schedule date					Card Report				
ID	Name	Department	Company	Handed	Company	Name	ID	Handed	Company
1	1	Company	1	1	1	1	1	1	1
2	2	Company	2	2	2	2	2	2	2
3	3	Company	3	3	3	3	3	3	3
4	4	Company	4	4	4	4	4	4	4
5	5	Company	5	5	5	5	5	5	5
6	6	Company	6	6	6	6	6	6	6
7	7	Company	7	7	7	7	7	7	7
8	8	Company	8	8	8	8	8	8	8
9	9	Company	9	9	9	9	9	9	9
10	10	Company	10	10	10	10	10	10	10
11	11	Company	11	11	11	11	11	11	11
12	12	Company	12	12	12	12	12	12	12
13	13	Company	13	13	13	13	13	13	13
14	14	Company	14	14	14	14	14	14	14
15	15	Company	15	15	15	15	15	15	15
16	16	Company	16	16	16	16	16	16	16
17	17	Company	17	17	17	17	17	17	17
18	18	Company	18	18	18	18	18	18	18
19	19	Company	19	19	19	19	19	19	19
20	20	Company	20	20	20	20	20	20	20
21	21	Company	21	21	21	21	21	21	21
22	22	Company	22	22	22	22	22	22	22
23	23	Company	23	23	23	23	23	23	23
24	24	Company	24	24	24	24	24	24	24
25	25	Company	25	25	25	25	25	25	25
26	26	Company	26	26	26	26	26	26	26
27	27	Company	27	27	27	27	27	27	27
28	28	Company	28	28	28	28	28	28	28
29	29	Company	29	29	29	29	29	29	29
30	30	Company	30	30	30	30	30	30	30



You can use Excel; you can be an excellent Workforce Management Manager!



K40 Pro

SSR Fingerprint Time Attendance Terminal

Introduction


K40 Pro is a 2.8-inch TFT screen Time Attendance & Simple Access Control Terminal. It has interfaces for third party electric lock and exit button. TCP/IP and USB Host make data management extremely easy. Most importantly, the built-in backup battery can eliminate the trouble of power-failure. With elegant appearance and reliable quality, you can get the best from it.



Features:

- TCP/IP, USB -host
- Built-in battery
- Simple access control or external bell
- Multi languages
- SSR report in excel forms
- With Push Data technology

Configuration:

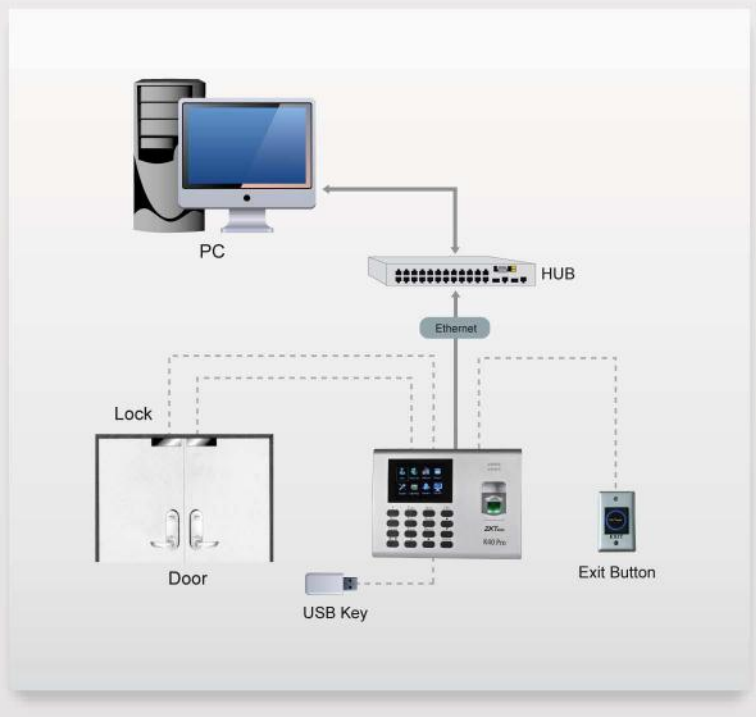

Specifications:

Fingerprint Capacity	1000 (2000 without SSR)
ID Card Capacity	1000 (Optional)
Record Capacity	80,000
Display	2.8-inch TFT Screen
Communication	TCP/IP, USB Host
Standard Functions	Work Code, SMS, DST, Self-Service Query, Automatic Status Switch, Scheduled-bell, T9 Input, 9 Digit User ID, Built-in Battery, Simple Access Control or External Bell
Optional Functions	ID/Mifare
Software	ZKTime5.0
Power Supply	DC 12V 1.5A
Verification Speed	≤0.5 Sec.
Operating Temp.	0°C - 45°C
Operating Humidity	20%-80%
Dimension	184*136*37.6(Length*Width*Thickness)



ZKTeco Inc.

ZK Mansion, Wuhe Rd, Gangtou, Bantian, Buji Town, Longgang District, Shenzhen China 518129 Tel: +86-755-8960 2345/46/47/48 Fax: +86-755-8960 2675 www.zkteco.com

Global Service Hotline:

USA: + 1 732-412-6007
 Brazil: +55 11-5082-4315
 Mexico: +52-55-5298418
 Dubai: +971 4 6091 310
 Indonesia: +62 21 2921 8949
 Vietnam : +84-0169-5813007
 Russia: +8 915 178-46-81

EU: +34 916532891
 Thailand: +66-29144238
 South Africa: +27 12 259 1047
 India: +91-0124-2623170
 Egypt: +201110444134
 Philippines: +63 9084118832